

# IN01

## Multi-media Fingerprint Time Attendance Terminal



### Introduction

IN01 is an innovative biometric fingerprint reader for time attendance applications, Built-in 2000 mAh backup battery can eliminates the trouble of power-failure. Support optional GPRS and Wi-Fi. The IN01 features the fastest commercial-based fingerprint matching algorithm and ZK high-performance, high-image quality optical fingerprint sensor. The 3" TFT can display more information vividly, including fingerprint image quality and verification result etc. TCP/IP communication is standard and make sure the data transmission between terminal and PC can be easily done within several seconds.




**EXTRASYS MAROC sarl**  
Mobile: 0661 63 55 73 E-mail: [extrasysmaroc@gmail.com](mailto:extrasysmaroc@gmail.com)  
0600 65 42 37 Site web: [www.extrasys.ma](http://www.extrasys.ma)

#### Features:

- \* Color TFT screen with GUI Interface for ease of use.
- \* ZK Optical Sensor
- \* 1 touch a-second user recognition
- \* Reads Fingerprint and/or PINs
- \* Optional integrated proximity or smart card reader
- \* Built-in Serial and Ethernet ports
- \* Multi Language Support
- \* Built-in battery backup provides approx 4 hours continuous operation.
- \* Optional built-in wireless Wi-Fi or GPRS for wireless communication.
- \* Real-time 1-touch data export 3rd party hosted & non-hosted applications
- \* SDK available for OEM customers and software developers

#### Configuration:

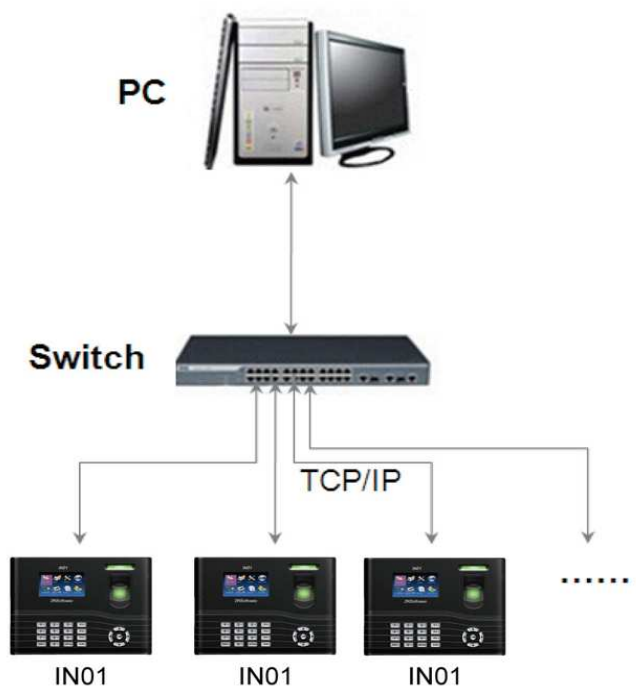

#### Specifications:

Fingerprint Capacity	3000 templates
Transaction Capacity	100,000
Hardware Platform	ZEM510
Sensor	ZK Optical Sensor
Algorithm Version	ZK Finger v10.0 and v9.0, default v10.0
Communication	TCP/IP, USB-Client, USB-Host
Standard Functions	Work code, SMS, DLST, Self-Service Query, Automatic Status Switch, Back-up battery
Optional Functions	ID/Mifare/HID, Extensible barcode, Scheduled-bell, Web-server, SOAP, 9 digit user ID, Wi-Fi, GPRS
Display	3 inches TFT Screen
Power Supply	12V DC 1.5A
Operating Temperature	0 °C - 45 °C
Operating Humidity	20% - 80%
Dimension(W×H×D)	210×157×50 mm



**EXTRASYS MAROC sarl**  
Mobile: 0661 63 55 73 E-mail: [extrasysmaroc@gmail.com](mailto:extrasysmaroc@gmail.com)  
0600 65 42 37 Site web: [www.extrasys.ma](http://www.extrasys.ma)